



new product

# RS10XP LED Series

Remote Fixtures  
Hazardous Locations



## FEATURES

- CSA Certified for use in hazardous locations:
  - Class I, Divisions 1 and 2, Groups C, D
  - Class II, Divisions 1 and 2, Groups E, F, G
  - Class III
- High efficacy LED lamps
- Die cast aluminum body with gray epoxy powder coat finish
- Clear, impact and heat resistant prismatic glass globe
- Available in 6, 12 and 24V & 120V
- Available with single-lamp or twin-lamp combination
- T6 – maximum 85°C (185°F) temperature rating
- Meets or exceeds C22.2 No.137-M1981
- Certified CSA 22.2 No.141

See warranty details at: [www.tnb.ca/en/brands/lumacell](http://www.tnb.ca/en/brands/lumacell)

## TYPICAL SPECIFICATIONS

Supply and install the Lumacell® RS10XP LED Series of hazardous location remote heads. The head housing will be die cast aluminum with gray epoxy powder coat finish. The lens shall be a clear, impact and heat resistant prismatic glass globe. The head shall be factory sealed. External seals shall not be required.

The remote shall come complete with a \_\_\_\_\_ mounting connection and include \_\_\_\_\_ lamp(s) rated \_\_\_\_\_ V \_\_\_\_\_ W.

The remote head shall be suitable for Class \_\_\_\_\_, Division \_\_\_\_\_, Group \_\_\_\_\_.


The remote fixtures shall be certified to CSA 22.2 No.141.

The remote unit shall be the Lumacell® model:

RS \_\_\_\_\_.

## DIMENSIONS

Dimensions are approximate and subject to change.

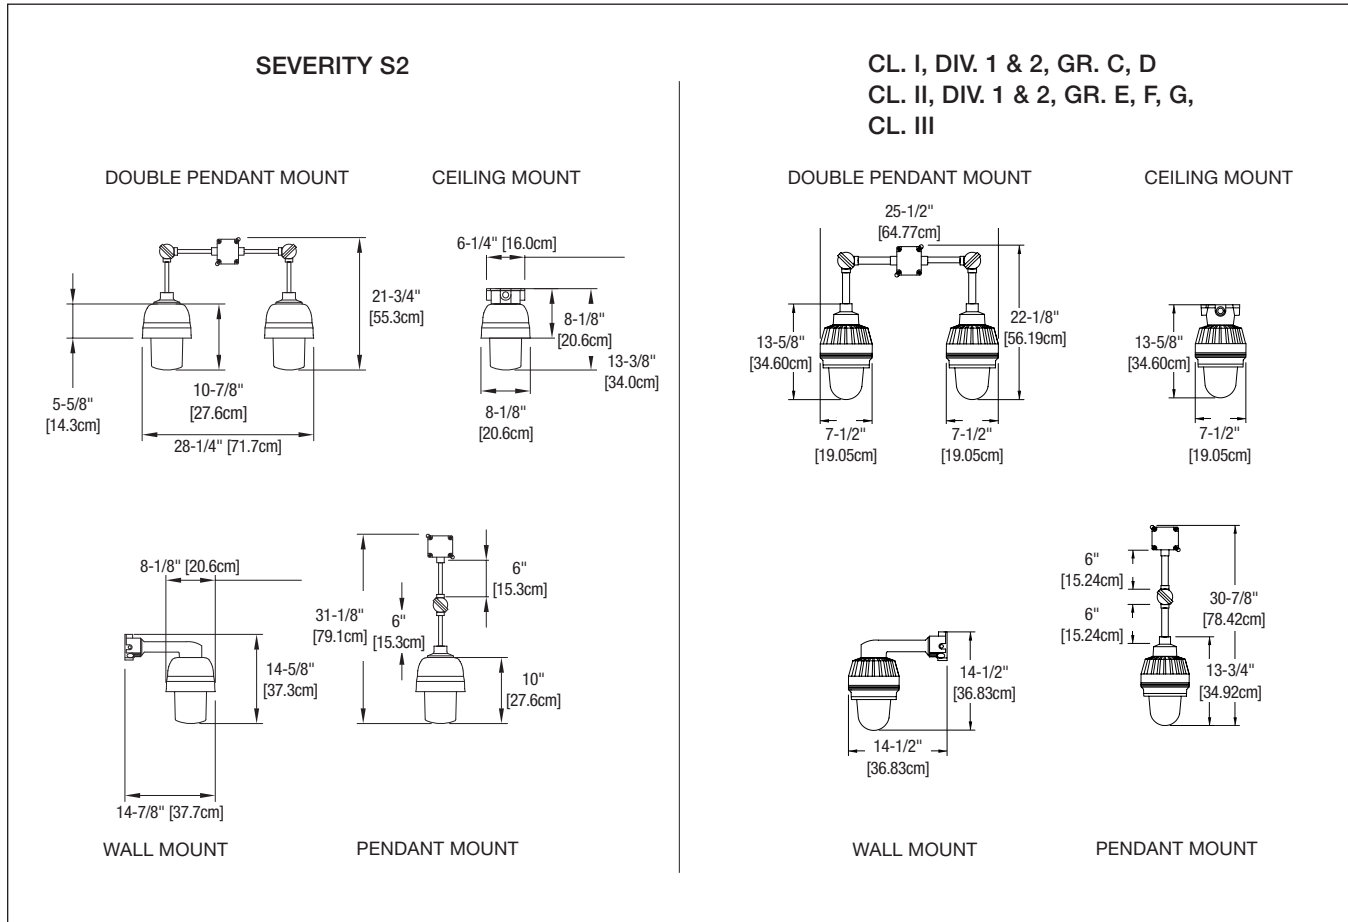



new product



# RS10XP LED Series

## Remote Fixtures Hazardous Locations

### 3. RS10-XP

SERIES	LAMP TYPE	LAMPS WATTAGE & TYPE	SEVERITY CODE	MOUNTING
<b>RS10XP</b> = single remote, 1 lamp <b>RS20XP</b> = single remote, 2 lamp <b>RS20FXP</b> = double remote, 1 lamp each <sup>1</sup>	<b>Blank</b> = MR16 LED	<b>LD1</b> = 6V-4W, MR16 LED <b>LD2</b> = MR16 LED, 6V-5W <b>LD7</b> = 12V-4W, MR16 LED <b>LD9</b> = 12V-5W, MR16 LED <b>LD10</b> = 12V-6W, MR16 LED <b>LD13</b> = 24V-4W, MR16 LED <b>LD25</b> = 120V-4W, GU10 LED	<b>Blank</b> = Cl. I, Div. 1 & 2, Gr. C, D Cl. II, Div. 1 & 2, Gr. E, F, G, Cl. III <b>S2</b> = Cl.I, Div.1, Gr. C, D	<b>C</b> = ceiling mount <b>P</b> = pendant mount <b>W</b> = wall mount

<sup>1</sup>Pendant mount only

EXAMPLE: RS10XPLD1C