



RG-X LED "Exit" Series

Battery Units,
Self-Powered Exit Signs,
Combination Units



CSA certified for use in hazardous locations

The **RG-X LED Exit Series** of battery equipment is designed to cover emergency lighting applications for the entire spectrum of hazardous locations, where inflammable gases, vapors, liquids, dust particles or fabrics tissues are permanently present or are likely to exist.

The **RG-X LED Exit Series** combines in one simple-to-order catalogue family three traditional emergency lighting products with battery back-up: battery units with emergency lights, Self-Powered Exit Signs, and combination units with emergency lights and Exit Sign. The equipment is also available with additional emergency power capacity to drive remote heads and Exit Signs.

FEATURES

- CSA Certified for use in hazardous locations:
 - Class I, Division 1, Groups B, C, D
 - Class I, Division 2, Groups A, B, C, D
 - Class II, Divisions 1 and 2, Groups E, F, G
 - Class III, Divisions 1 and 2
- For wall mount only
- Die-Cast aluminum body with grey epoxy powder coat finish; clear, impact and heat resistant prismatic glass globe
- Long-life, maintenance-free lead-calcium battery
- Battery charger is current limited, temperature compensated, short-circuit proof and reverse polarity protected
- Emergency heads with one or twin lamp design
- Large Self-Powered exit (combo) includes a transfer circuit to drive three (3) remote LED-based remote Exit Signs
- Self-Powered combo includes a transfer panel to drive three remote LED-based remote Exit Signs
- Meets or exceeds CSA C22.2 No. 141-10 & No. 137
See warranty details at: www.tnb.ca/en/brands/lumacell

TYPICAL SPECIFICATIONS

Supply and install the **Lumacell® RG-X LED Exit Series** of hazardous location battery equipment. The battery unit housing will be constructed of die cast aluminum with grey epoxy powder coat finish and equipped with heavyduty key holes for wall mounting. The equipment shall be rated for 120, 277 or 347V, 60 Hz input and be CSA listed. The equipment shall have an output of _____ V and _____ W and shall supply the rated load for a minimum of a 1/2 hour to 87,5% of the rated battery voltage. The battery shall be a long-life, maintenance-free lead-calcium type. The charger shall be fully computer tested and have its charge voltage set in the factory to ± 1% tolerance. The charger shall be current limited, temperature compensated, shortcircuit proof and reverse polarity protected. The charger shall be furnished with an electronic lockout circuit, which will connect the battery when the AC circuit is activated, and an electronic brownout circuit.

Where required the equipment shall come complete with _____ heads, each of them equipped with _____ lamp(s) of _____ W.

The head housing shall be Die-Cast aluminum with grey epoxy powder coat finish. The lenses shall be a clear, impact and heat resistant prismatic glass globe. The head shall be factory sealed, with no need for external seals.

Where required the equipment shall come complete with one Exit Sign and will include a transfer circuit to maintain the Exit Sign permanently lighting in both normal and emergency operation. The exit housing shall be industrial grade 14-gauge steel and finished in grey enamel. The faceplate will be constructed of heavy-duty 14-gauge steel.


The equipment shall be certified CSA C22.2 No.137-M1981 for Hazardous Locations Class _____, Division _____, Group _____.

The Exit Sign shall be CSA C22.2 No.141-10 certified.

The equipment shall be **Lumacell®** Model: _____ .

DIMENSIONS

Dimensions are approximate and subject to change.

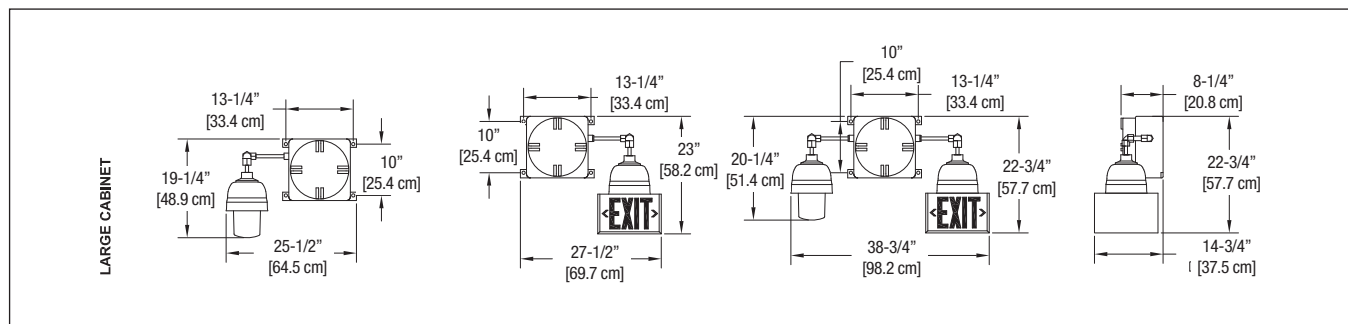



RG-X LED "Exit" Series

Battery Units,
Self-Powered Exit Signs,
Combination Units



POWER CONSUMPTION AND UNIT RATING

UNIT CAPACITY	INPUT VOLTAGE	INPUT RATING	WATTAGE CAPACITY				
			30MIN	1H00	1H30	2H00	4H00
12V-120W	120V, 60Hz	0.45A, 37W	120	60	40	30	15
	277V, 60Hz	0.209A, 42W					
	347V, 60 Hz	0.176A, 42W					
24V-144W	120V, 60Hz	0.465A, 38W	144	72	50	40	20
	277V, 60Hz	0.208A, 42W					
	347V, 60 Hz	0.178A, 42W					

TEMPERATURE CODES: MEASURED AT 40°C AMBIENT

Explosion-proof equipment is composed of one or more modules, each of them qualified for a specific temperature code. The temperature code of the complete equipment (enclosure + exit sign + emergency heads) is defined as the most severe of the temperature codes identified for each of the modules below.

TEMPERATURE CODES FOR RG-X SERIES (Battery & exit combination units)

SEVERITY CODE	S1	S2	S3	S4
TEMPERATURE CODE	T6 85°C (185°F)	T6 85°C (185°F)	T6 120°C (248°F)	T6 85°C (185°F)

SEVERITY CODE SELECTION CHART

ENVIRONMENT	SEVERITY CODE
Cl. I, Div. 1 & 2, Gr. B	S1
Cl. I, Div. 1, Gr. C, D	S2
Cl. I, Div. 2, Gr. A, B, C, D	S3
Cl. II, Div. 1 & 2, Gr. E, F, G & Cl. III	S4

RG-X

D.C VOLTAGE	CAPACITY	HOUSING	SIGN/FACE	HEAD STYLE	LAMP TYPE, VOLTAGE AND POWER	SEVERITY CODE	A.C VOLTAGE	OPTIONS
RG12= 12V	120= 120W	X= Hazardous location	Blank= No sign E1= Single face LED "EXIT" E2= Double face LED "EXIT"	0= No heads A1= Single remote, 1 lamp A2= Single remote, 2 lamps A3= Double remote, 1 lamp each ¹	Blank= no lamp LD7= 12V-4W MR16 LED LD9= 12V-5W MR16 LED LD10= 12V-6W MR16 LED LD13= 24V-4W MR16 LED	S1= Cl.I, Div.1&2, Gr. B S2= Cl.I, Div.1, Gr. C, D S3= Cl.I, Div.2, Gr. A, B, C, D S4= Cl.II, Div.1&2, Gr. E, F, G & Cl.III	Blank= 120VAC ZC= 277VAC input ZD= 347VAC input	Blank= No options TD= Time delay (15 minutes) TP= Transfer panel ^{1,2}
RG24= 24V	144= 144W							

EXAMPLE: RG12120XE1A1LD7S2