



RLR LEGEND™ SERIES

Recessed Designer Series

FEATURES

- Contemporary, enduring designs
- 4W, 5W, 6W lamps
- LED light source
- Will blend in with regular decorative recessed fixtures
- Choice of housing for new construction or insulated ceiling
- RLR8R is made of powder coated or electro-plate steel
- RLR9 and RLR2 are made of Die-Cast aluminum

See warranty details at: www.tnb.ca/en/brands/ready-lite



TYPICAL SPECIFICATIONS

The contractor will supply and install **Ready-Lite® RLR Legend™ Collection** recessed heads and housing. Recessed heads will be constructed of durable powder coated metal and use LED lamps. The light source will be _____ V, _____ W LED lamps.

The remote unit shall be **Ready-Lite®** model: _____, housing shall be **Ready-Lite®** model: _____.

REPLACEMENT LAMPS

| MODEL | LAMP TYPE | VOLTAGE/WATTAGE |
|-------------|-----------|-----------------|
| 580.0097-RL | MR16, LED | 6V-4W |
| 580.0122-RL | MR16, LED | 6V-5W |
| 580.0093-RL | MR16, LED | 12V-4W |
| 580.0104-RL | MR16, LED | 12V-5W |
| 580.0106-RL | MR16, LED | 12V-6W |
| 580.0098-RL | MR16, LED | 24V-4W |
| 580.0100-RL | MR16, LED | 24V-6W |

See Guardian list of lamps

HOUSING


| MODEL | HOUSING TYPE | APPLICATION |
|-----------|---------------------------------|------------------|
| RL-GRHR03 | non-insulated ceiling 6-24V | new construction |
| RL-GRHR04 | non-insulated ceiling 6-24V | renovation |
| RL-GRHR05 | non-insulated ceiling 120V GU10 | new construction |
| RL-GRHR06 | insulating ceiling 6-24V | new construction |

MR16 LED COMPATIBILITY CHART

| HEAD STYLE | 6V-4W | 12V-4W | 24V-4W | 12V-5W | 12V-6W |
|------------|-------|--------|--------|--------|--------|
| RLR8R | x | x | x | x | x |
| RLR9 | x | x | x | x | x |

DIMENSIONS

Dimensions are approximate and subject to change.

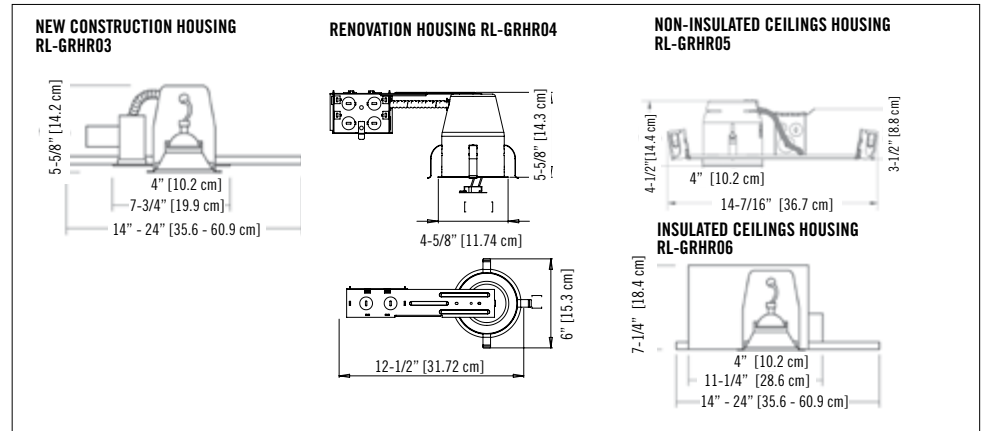

ORDERING INFORMATION

| SERIES | HEAD STYLE | COLOUR | VOLTAGE / WATTAGE | OPTIONS |
|---------------------------------|---|--|---|--|
| RLR= decorative recessed remote | 8R= concave (tilting round rear load) 9= concave (egress/ regress) | BK= black (8R & 9 series only) BN= brushed nickel (8R & 2 series only) WH= white | LD1= MR16 LED, 6V-4W LD2= MR16 LED, 6V-5W LD7= MR16 LED, 12V-4W LD9= MR16 LED, 12V-5W LD10= MR16 LED, 12V-6W LD13= MR16 LED, 24V-4W LD14= MR16 LED, 24V-6W LD25= MR16 LED, 120V-4W | PM= complete with pendant mount backbox ¹ pendant kit sold separately |

EXAMPLE: RLR8RBKLD1