



Nexus® Pro 

## RC Series

Steel, compact, 6 and 12V



### FEATURES

- Compact steel cabinet with corrosion-resistant undercoating
- Quick and easy installation – pre-assembled cordset, no batteries or board to remove before installation
- Universal Spider knockout pattern for junction box mounting
- Fully automatic solid-state charger with test switch and AC-on pilot light
- Sealed dust-proof transfer relay circuit and low-voltage disconnect
- Long-life, maintenance-free sealed Lead-Acid battery
- Heads require no tools for orientation
- Standard input 120VAC with line cord installed
- 120/347VAC without line cord
- Meets or exceeds CSA C22.2 No. 141-15

See warranty details at: [www.tnb.ca/en/brands/lumacell](http://www.tnb.ca/en/brands/lumacell)

### TYPICAL SPECIFICATIONS


The contractor shall install the **Lumacell® RC Series** battery units. The emergency lighting system shall consist of fully automatic equipment with two emergency lighting heads. The unit shall be rated \_\_\_\_ V with a capacity of \_\_\_\_ W for 30 minutes of emergency operation. The charger shall be factory set with a charging voltage tolerance of  $\pm 1\%$  to enable a longer battery life. The emergency light heads shall require no tools for adjusting or aiming. The metal cabinet shall be made of steel with anti-corrosion undercoating. The unit equipped with the auto-test micro-controller board shall self-test 1 minute every 30 days, 10 minutes in the 6th month and 30 minutes every 12 months. The unit shall be supplied with a test switch and diagnostic LED indicator lights to continuously monitor the status of the unit: Battery Failure, Battery Disconnect, Charger Failure, Lamp Failure, Service Alarm, main voltage AC "ON", Charger High Rate.

The unit shall be CSA 22.2 No.141-15 certified.

The unit shall be Lumacell® model: \_\_\_\_\_ .

### DIMENSIONS

Dimensions are approximate and subject to change.

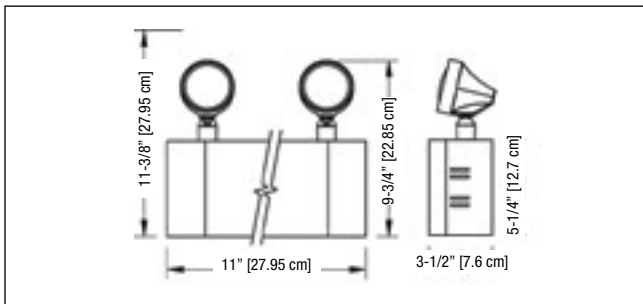

### REPLACEMENT LAMPS

ORDERING CODE	TYPE	VOLTAGE/ WATTAGE
580.0097-L	MR16 LED	6V-4W
580.0122-L	MR16 LED	6V-5W
580.0093-L	MR16 LED	12V-4W
580.0104-L	MR16 LED	12V-5W
580.0106-L	MR16 LED	12V-6W

### WIRE GUARDS

460.0080-L	Wall Mount
------------	------------

### POWER CONSUMPTION AND UNIT RATING

MODEL	AC SPECS	WATTAGE CAPACITY					
		30MIN	1H	1H30	2H	4H	
RC27	120/347 VAC	0.06/0.02A	27	15	11	9	-
RC44		0.18/0.06A	44	26	18	15	7
R12C44		0.31/0.10A	44	26	18	15	7

### ORDERING INFORMATION

SERIES	CAPACITY	# OF HEADS	HEAD STYLE/ WATTAGE	COLOUR	AC VOLTAGE	CHARGER	OPTIONS
RC= 6V	27= 27W 44= 44W	Blank= no heads 1= one head 2= two heads	LD1= MR16 LED, 6V-4W LD2= MR16 LED, 6V-5W LD7= MR16 LED, 12V-4W LD9= MR16 LED, 12V-5W LD10= MR16 LED, 12V-6W	Blank= factory white BK= black	Blank= 120VAC c/w line cord ZC= 277VAC input ZD= 120/347VAC input	NEXP= NEXUS® Pro IoT	Blank= no options CT= cabtire¹ TL= cabtire with twist lock plug¹
R12C= 12V	44= 44W						
							¹ 120V Standard

EXAMPLE: RC272LD1NEXP

by ABB

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by ABB Inc. is under license. Other trademarks and trade names are those of their respective owners.

LUMACELL