


The Marrette<sup>®</sup> Luminaire Disconnect protects electricians servicing fluorescent lights over 150V from electrical shock!

## Suited for

- Fluorescent lighting fixture and ballast (OEMs)
- Electricians servicing fluorescent light fixtures
- Maintenance personnel requiring an electrical disconnect

## Specifications

|                    |   |
|--------------------|---|
| Housing:           | Polycarbonate   |
| Contacts:          | Tin-plated brass  |
| Integral leads:    | Insulated 18 AWG solid copper                                     |
| Max. temp. rating: | 105°C   |
| Flammability:      | UL94-V2 (V0 available on request)                                 |
| Electrical rating: | 4A, 600V  |
| Standards:         | CSA Certified, UL listed, NEC 410.73(G)<br>2005 edition compliant |

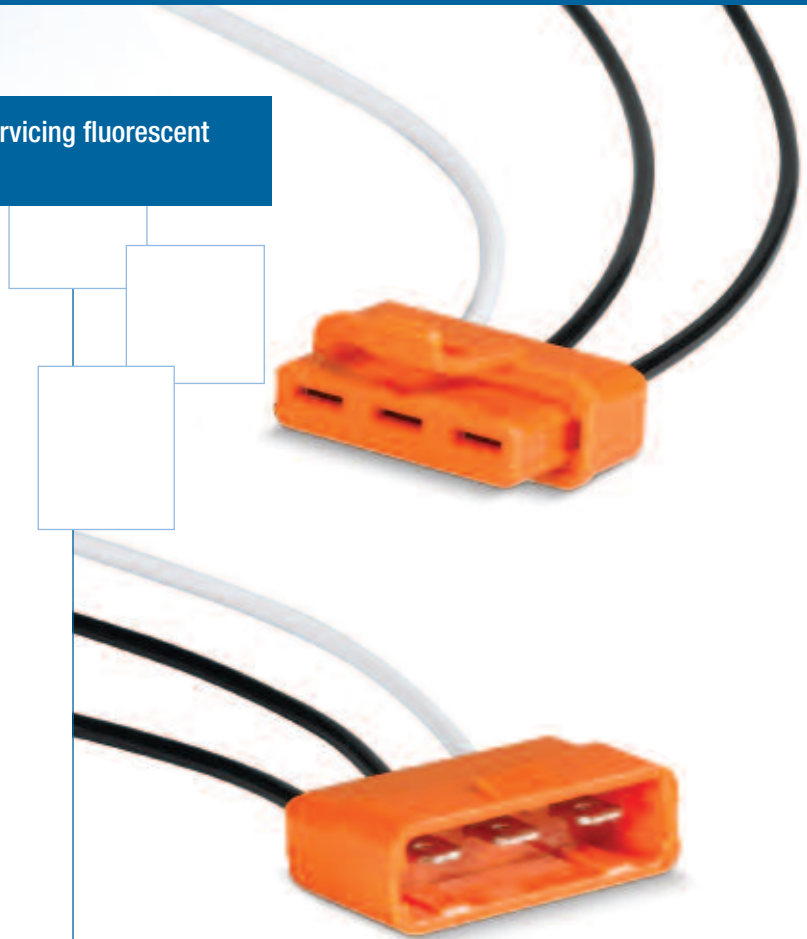

**Ordering Information**

| Model  | Description  |
|--------|--|
| LD2C-D | 2-pole luminaire disconnect (marrettes not included)                     |
| LD3C-D | 3-pole luminaire disconnect (marrettes not included)                     |
| LD2-C  | 2-pole luminaire disconnect (2 x 4 marrettes 333 /inner bag)             |
| LD3-C  | 3-pole luminaire disconnect (6 of each marrettes (331 + 333) /inner bag) |

**Packaging Options**

|             | Catalogue Number | Packaging Format | Std. Pkg. (Min./Mult.)   |
|-------------|------------------|------------------|--|
| <b>BULK</b> | LD2C-D<br>LD3C-D | Box<br>Box       | Sold <b>without</b> marrettes.<br>Inner: 50 per inner bag<br>Outer: 250 per outer box<br>Master: 500 in master box<br><b>Sold in multiple of 500</b> |
|             | LD2-C<br>LD3-C   | Bag<br>Bag       | Sold <b>with</b> marrettes.<br>Inner: 2 per inner bag<br>Outer: 20 per outer bag<br>Master: 200 in master box<br><b>Sold in multiple of 20</b>       |