
Stainless steel sealing ring



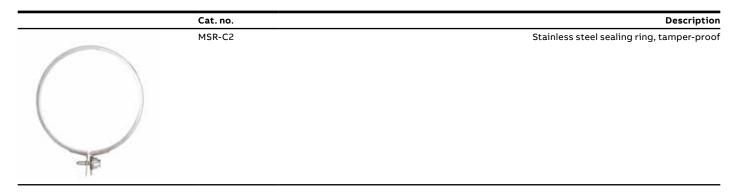

Meter protectors Product specifications

- Meter protector for use in problem areas (trailer parks, playgrounds, conservation areas)
- Steel construction (16 ga. galv. steel)
- Clear, unbreakable polycarbonate front cover, which allows full view of meter revenue reading and serial number
- Sealing and padlocking provision
- · Grey painted

Cat. no.	Description
MP01	71% in. dia. x 43% in. deep for use with single-phase residential meters
MP02	7% in. dia. x $8%$ in. deep for use with all meters, other than single-phase residential meters

Blank meter cover plates

Description	Cat. no.	
Grey ABS	BS087	
Plastic "throw-away" cover	BS089	
Clear unbreakable polycarbonate	BS090	

Not recommended as a permanent cover for energized meter sockets.

Jumper bar



Cat. no. Description
CM-BS100 200 A max.

Mast coupler



Cat. no. Description

MH200

Fits all sockets with regular 2½ in. hub opening

Hubs for rigid conduit



	Cat. no.	PVC cat. no.	A hub size (in.)	В
MH10X	MH10X	_	1	For 2½ in. regular hub opening (add hub adapter plate
	MH12X	E991G	11/4	BS052 if used with units having 4 in. hub openings)
	MH15	E991H	11/2	
	MH20	E991J	2	
	MH25	E991K	21/2	
	MH30	E991L	3	For 4 in. hub opening
	MH35	_	3½	
	MH40	_	4	Diagram <u>;← B → </u>



Hub adapter plate



Cat. no.	Description
BS052	Permits use of regular size hubs on larger hub openings

⊕

Hub opening closure plates



Description	Cat. no.	
Inside attachment for regular hub opening (i.e. 1 in. to $2\frac{1}{2}$ in.	BS051	
Inside attachment for larger hub opening (i.e. 3 in. to 4 in.	BS054	

Single-gang meter sockets insulated neutral kits



Cat. no.	Description
IN1000-M, IN1000-S	100 A series BA/BE, 100 A series PL17
IN2000-M, IN2000-S	200 A series BQ/BS, 200 A series PL27

-M means installs in middle -S means installs on side Specify socket when ordering.

Single-gang meter sockets ground lug on neutral kit



	Cat. no.	Description
	GN1000	100A Max, for BA, BE series
OR	GN2000	200 A Max. for BQ2, BS2 series

Click on the button to get to the meter socket conversion kits cross-reference chart.



Multi-gang meter sockets insulated neutral kit



BDAX, BDCX, BEX, BECX, BSC4X, CO1X series

Cat. no.

IN4000-2, IN4000-3, IN4000-4, IN4000-5, IN4000-6

Click on the button to get to the meter socket conversion kits cross-reference chart. Click here

Multi-gang tunnel lugs kit



Cat. no.	Description	Qty.
LA300ZFAB-FG	BECX-V, BECX-VA, BDCX-V, BDCX-VA series	3 lugs (kit)


Identification marker kits


	Cat. no.	Description	Markers Kit Includes	Qty.	
Section in the second	MINI-ID-KIT	MINI-ID-KIT Plastic case	Stainless steel markers of each numbers 0 through 9 (dash + service)	10	
**************************************	MICRO-ID-KIT	Blue metal	Stainless steel markers of each letters A through D	10	
Company of the Compan		carrying cas	carrying case	Stainless steel markers of each numbers 0 through 9	10
			Word "SERVICE"	10	
		_	CM-BS100 Jumper bar 200 A max.	4	
		_	BS2027-FG Meter jaw safety shroud	10	


Identification markers


	Cat. no.	Description
301	No. 0 through No. 9 No. A through No. Z No. SERVICE	Clipped to the upper lip of the enclosure; provides permanent customer identification packed and sold in polyethylene bags of 10 identical markers except "SERVICE" which has 7 individual letters
Consist of thermoplastic insulators with jaws and connectors assembled for replacement of one meter socket		


Ready-to-install replacement block assemblies

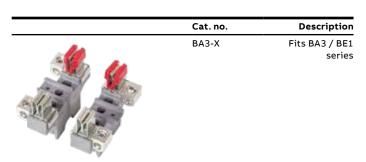

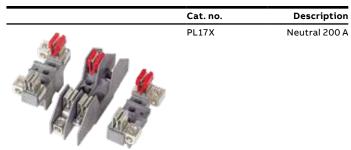

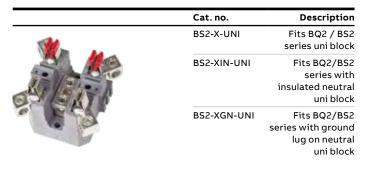

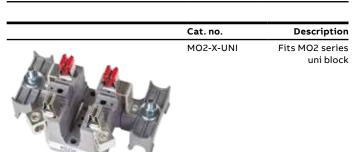

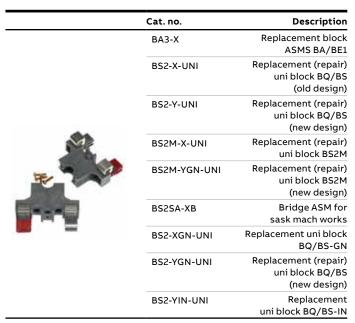

_

Accessories

Repair kits

Available replacement block accesories. Simply add suffix -FG to the components listed in the kit.

Bond lug

	Cat. no.	Description
650 B	BONDLUG2-FG	Bond lug to be used in BE1, BQ2, BS2, MO2–
30 33	NA75Z-3-FG	Bond lug to be used in BS2-TCVBC

Neutral lug

	Cat. no.	Description
	BS8608-FG	Neutral for MO2 200 A
10.0	CDA110-FG	Neutral for BE1 100 A

Shroud

	Cat. no.	Description
3	BS2027-FG	Red meter jaw safety shroud

Set screw

	Cat. no.	Description
 100	SCREW-BS1002-FG 100A	Set screw only for 100 A lugs
	SCREW-BS2402-FG 200A	Set screw only for 200 A lugs

Neutral

	Cat. no.	Description
010 D	BS2811L-FG	Neutral 200 A
	BS2811GN-FG	Neutral 200 A, comes with ground lug on neutral

Fifth jaw assemblies



		Standard capacity 9 o'clock position
	Meter socket series	C205
	BA3	•
	BDC	•
TEN.	BE1	•
3	BE2	•
	BEC	•
	BD2	•
	BQ2	•
	BS2 / BS2L	•
	BS4 / BSC4	•
	CO1	•
	CO2	•
	CO1 Multigang	•
	MO2	•
	JS4B	•

—

Pole mount bracket kit

	Cat. no.	Description	Conductor range (AWG)	Use with series	Option 1	Option 2
***	РМВ200	Secures Microlectric meter socket to a wooden pole via option 1 or 2	14–2	BA3, BE1, BP320 BQ2, BS, CL, CO1, CO2, CT, MO2, PL17, PL27, VT	Use a lag bolt through ⁵⁄i in. center keyhole	Use the two side bracket mounting holes (0.320 in. dia.) to wrap around the pole

Suitable for any Microlectric meter socket with mounting holes 5 in. apart. Attach meter socket using one or two bracket(s). PMB200 kit comes complete with 2 brackets, 1 ground connector. Includes assembly hardware.


Pole mounting kit

				Weight	
	Cat. no.	Kit includes	lb	kg	Qty
191	PMBJS4	Support hangers	9.03	4.09	;
900		⅓ in. x 4 in. lag bolt	_	_	
		¾ in. x 3 in. lag bolt	_	-	4
	5∕16 in. x 1 in. carriage bolts, nuts and lock washers	_	-	-	
000	PMB6X12	6 in. offset from pole c/w 12 in. strut	7.7	3.5	1
- T	PMB6X24	6 in. offset from pole, comes with 24 in. strut	9.2	4.2	
	PMB9X12	9 in. offset from pole, comes with 12 in. strut	9.2	4.2	
	PMB9X24	9 in. offset from pole, comes with 24 in. strut	11.0	5.0	

Pole line hardware

					Weight (100 pcs)		
Description	F dia. (in.)	G dia. (in.)	H dia. (in.)	T thick (in.)	lb	kg	Std. pkg.
Square washer	5/8	2	-	3/16	22	10.0	400
Carriage bolt	3/8	11/2	1½	-	11	5.0	50
Oval eye bolt	5/8	6	3	-	122	55.4	50
Oval eye bolt	5/8	8	4	_	136	61.8	50
Oval eye bolt	5/8	10	4	-	150	68.1	50
Oval eye bolt	5/8	12	4	_	168	76.3	50
	Square washer Carriage bolt Oval eye bolt Oval eye bolt Oval eye bolt	Square washer 5/8 Carriage bolt 3/8 Oval eye bolt 5/8 Oval eye bolt 5/8 Oval eye bolt 5/8	Square washer 5/6 2 Carriage bolt 3/8 1½ Oval eye bolt 5/6 6 Oval eye bolt 5/6 8 Oval eye bolt 5/6 10	Square washer 5/8 2 - Carriage bolt 3/6 11/2 11/2 Oval eye bolt 5/8 6 3 Oval eye bolt 5/6 8 4 Oval eye bolt 5/8 10 4	Square washer 5/8 2 - 3/16 Carriage bolt 3/6 1½ 1½ - Oval eye bolt 5/8 6 3 - Oval eye bolt 5/6 8 4 - Oval eye bolt 5/8 10 4 -	Square washer % 2 - %16 22 Carriage bolt % 1½ 1½ - 11 Oval eye bolt % 6 3 - 122 Oval eye bolt % 8 4 - 136 Oval eye bolt % 10 4 - 150	Square washer % 2 - % ₁₆ 22 10.0 Carriage bolt % 1½ 1½ - 11 5.0 Oval eye bolt % 6 3 - 122 55.4 Oval eye bolt % 8 4 - 136 61.8 Oval eye bolt % 10 4 - 150 68.1

Diagrams

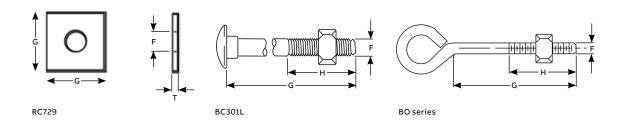

Breaker mounting bracket

Cat. no.	Description
CO3517M-FG	Adjustable mounting bracket for CO2, CO22 and CO42 series to adapt to Siemens, Square D and Eaton breakers

Flexible braid and conductor kits

Cat. no.	Description
CO2FB-KIT	Connection wire adaptor kit for CO2 series meter sockets for field installation; to be used with Cutler Hammer breakers
CO3009-KIT	Siemens type "QR" breaker conductor kit (breakers not included)
CO3009SD-KIT	Square D breaker conductor kit (breakers not included)
CO3409FB-KIT	Eaton breaker flexible braid kit (breakers not included)
CO3009A2-KIT	ABB breaker conductor kit (breakers not included)

Breakers

	Cat. no.	Description
7.	A1A100TL2TNB-FG	ABB 100 A 10 kA breaker
I.	A1N100TL2TNB-FG	ABB 100 A 22 kA breaker
100	A2A125TL2TNB-FG	ABB 125 A 10 kA breaker
6	A2A150TL2TNB-FG	ABB 150 A 10 kA breaker
	A2A200TL2TNB-FG	ABB 200 A 10 kA breaker
-	A2N125TL2TNB-FG	ABB 125 A 22 kA breaker
	A2N150TL2TNB-FG	ABB 150 A 22 kA breaker
	A2N2OOTL2TNB-FG	ABB 200 A 22 kA breaker

Connector kit

	Cat. no.	Description
	BP250	Connector kit 2 x 250 kcmi
300	BP500	Connector kit single lug

ABB Breaker conductor kit for 100 A type A1A

CO1009A1-KIT