

## Nonmetallic - Strut systems

### Sealant



#### Kit contents

- Resin
- Catalyst
- Stir stick and applicator


#### Brush-on resin seal kit

Cat. No.	Description
NM-RSK-QT	946 ml
To reseal fiberglass after field modifications. Vinylester resin.	

#### Spray sealant

- Spray acrylic to reseal fiberglass after field modifications.

#### Spray sealant

Cat. No.	Description
NM-CLEAR-1215	12 fl. oz. can
	
Should be used for top coating polyester applications only. Not recommended to seal vinylester.	

## Nonmetallic - Strut systems

### Pipe clamps


#### Rigid pipe clamp

Cat. No.	Nominal pipe size		Design load		Max. Torque		
	(in.)	(mm)	(lb)	(kg)	N	(in. - lb)	(N - m)
NM-SRPC050	½	12.7	300	136	1.33	10	1.13
NM-SRPC075	¾	19.1	300	136	1.33	10	1.13
NM-SRPC100	1	25.4	300	136	1.33	10	1.13
NM-SRPC114	1¼	31.8	300	136	1.33	10	1.13
NM-SRPC112	1½	38.1	300	136	1.33	10	1.13
NM-SRPC200	2	50.8	300	136	1.33	10	1.13
NM-SRPC212	2½	63.5	300	136	1.33	10	1.13
NM-SRPC300	3	76.2	300	136	1.33	10	1.13
NM-SRPC312	3½	88.9	300	136	1.33	10	1.13
NM-SRPC400	4	101.6	300	136	1.33	10	1.13

Safety factor of 3 on design load.

#### Conduit swivel clamp

Cat. No.	Description
NM-SCSC-(CTD)	Conduit swivel clamp

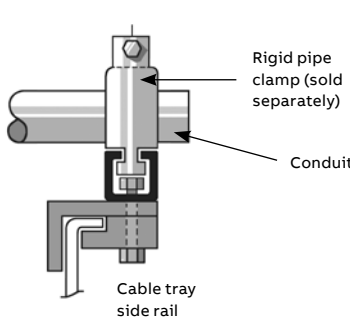

Cable tray designation (CTD) required. (Ex. 6CP series designates 6" deep polyester resin). Pipe clamps are a separate order item.