


## Primers

### Multi-purpose spray-on PVC cement

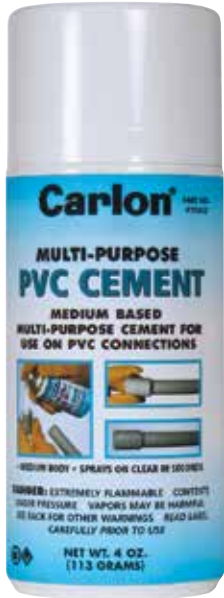

#### No waste • sprays on in seconds • fast setting

- Equivalent to a medium-bodied low-VOC, quick setting clear cement
- No more spills
- Reuse can until empty
- Installation: 10 °C to 26 °C  
Storage: 1 °C to 48 °C
- Meets ASTM D-2564
- 3-year shelf life
- One 120 ml can is equivalent to 120 ml of non-aerosol PVC cement\*

\*Equivalence is subject to usage and will vary

#### Applications

- For use with up to 4 in. dia. Schedule 40 PVC electrical conduit.
- For use with PVC raceways only. Not recommended for use on water, sewer, natural gas, compressed gas or air connections.

Temperature range	Recommended set time		
	Pipe sizes ½ in. to 1¼ in.	Pipe sizes 1½ in. to 2 in.	Pipe sizes 2½ in. to 4 in.
15 to 37.7 °C	2 min.	5 min.	30 min.
4 to 15 °C	5 min.	10 min.	2 hrs.
-17 to 4 °C	10 min.	15 min.	12 hrs.

Recommended set time may vary depending on humidity

Cat. no.	Size (ml)	Ctn. qty.	Ctn. wt. (lb)
VC9AC5C	120	12	5.6