

## SWC series

### 30 AWG individual strand



#### Ordering information:

**Length:** Standard total lengths are 304 mm (12 in.). For different lengths, add your desired length in millimeters at the end of the part number.

Ex.: SWC130A1406 (for 16 in. long)


**Plating:** Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

#### Standard flexible connectors – 4-hole NEMA standard

Cat. no.	*Ampacity $\Delta$ 65 °C	W in. (mm)	F in. (mm)	S in. (mm)	H in. (mm)	S2 in. (mm)	H2 in. (mm)	T in. (mm)	Weight lb (g)
SWC130A1	1,300	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1¾ (44.4)	⅞ (14.3)	¼ (6.3)	1.93 (875)
SWC130A2	1,300	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1½ (38.1)	⅞ (11.1)	¼ (6.3)	1.93 (875)
SWC130A3	1,300	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	¼ (6.3)	1.93 (875)
SWC150A1	1,500	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1¾ (44.4)	⅞ (14.3)	⅜ (8)	2.62 (1,188)
SWC150A2	1,500	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1½ (38.1)	⅞ (11.1)	⅜ (8)	2.62 (1,188)
SWC150A3	1,500	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	⅜ (8)	2.62 (1,188)
SWC215A1	2,150	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1¾ (44.4)	⅞ (14.3)	⅜ (9.5)	3.31 (1,501)
SWC215A2	2,150	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1½ (38.1)	⅞ (11.1)	⅜ (9.5)	3.31 (1,501)
SWC215A3	2,150	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	⅜ (9.5)	3.31 (1,501)
SWC235A1	2,350	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1¾ (44.4)	⅞ (14.3)	½ (12.7)	4.69 (2,127)
SWC235A2	2,350	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1½ (38.1)	⅞ (11.1)	½ (12.7)	4.69 (2,127)
SWC235A3	2,350	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	½ (12.7)	4.69 (2,127)


\*Temperature rise test per; CEI60694, IEEE / ANSI C37, 34 1994.

#### Diagram

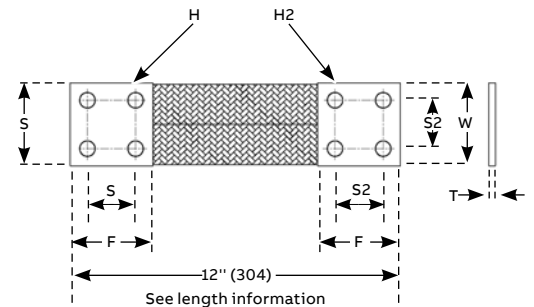

## SWC series

### 30 AWG individual strand

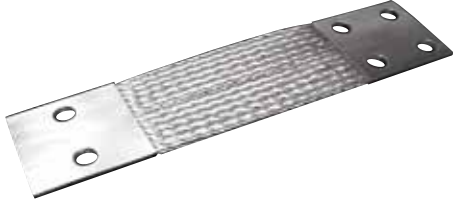

#### Ordering information:

**Length:** Standard total lengths are 304 mm (12 in.). If different lengths are required, add your desired length in millimeters at the end of the part number. Ex.: SWC215C2406 (for 16 in. long)


**Plating:** Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

#### Standard flexible connectors – 4/2-hole NEMA standard

Cat. no.	*Ampacity Δ 65 °C	W in. (mm)	F in. (mm)	S in. (mm)	H in. (mm)	S2 in. (mm)	H2 in. (mm)	T in. (mm)	Weight lb (g)
SWC130C1	1,300	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1¾ (44.4)	⅞ (14.3)	¼ (6.3)	1.97 (894)
SWC130C2	1,300	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1¾ (44.4)	⅞ (14.3)	¼ (6.3)	1.97 (894)
SWC150C1	1,500	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1¾ (44.4)	⅞ (14.3)	⅝ (8)	2.67 (1,211)
SWC150C2	1,500	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1¾ (44.4)	⅞ (14.3)	⅝ (8)	2.67 (1,211)
SWC215C1	2,150	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1¾ (44.4)	⅞ (14.3)	⅝ (9.5)	3.37 (1,529)
SWC215C2	2,150	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1¾ (44.4)	⅞ (14.3)	⅝ (9.5)	3.37 (1,529)
SWC235C1	2,350	3 (76.2)	3 (76.2)	1¾ (44.4)	⅞ (14.3)	1¾ (44.4)	⅞ (14.3)	½ (12.7)	4.77 (2,164)
SWC235C2	2,350	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1¾ (44.4)	⅞ (14.3)	½ (12.7)	4.77 (2,164)


\*Temperature rise test per; CEI60694, IEEE / ANSI C37, 34.1994.

#### Diagram

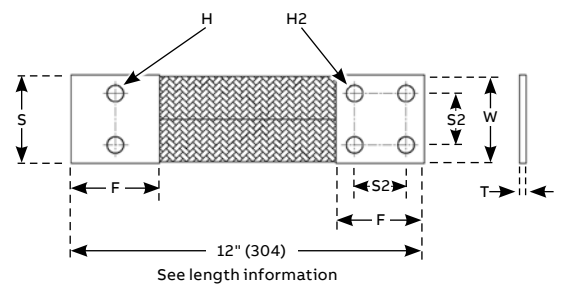

## SWC series

### 30 AWG individual strand

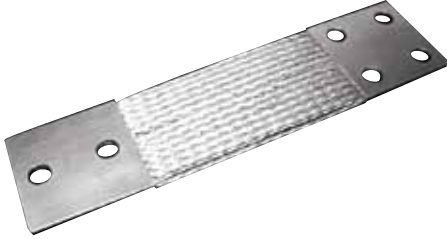

#### Ordering information:

**Length:** Standard total lengths are 304 mm (12 in.). If different lengths are required, add your desired length in millimeters at the end of the part number. Ex.: SWC150D1406 (for 16 in. long)


**Plating:** Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

#### Standard flexible connectors – 4/2-hole NEMA standard

Cat. no.	*Ampacity $\Delta$ 65 °C	W in. (mm)	F in. (mm)	S in. (mm)	H in. (mm)	S2 in. (mm)	H2 in. (mm)	T in. (mm)	Weight lb (g)
SWC130D1	1,300	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	$\frac{1}{4}$ (6.3)	1.97 (894)
SWC130D2	1,300	3 (76.2)	3 (76.2)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	$\frac{1}{4}$ (6.3)	1.97 (894)
SWC150D1	1,500	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	$\frac{5}{16}$ (8)	2.67 (1,211)
SWC150D2	1,500	3 (76.2)	3 (76.2)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	$\frac{5}{16}$ (8)	2.67 (1,211)
SWC215D1	2,150	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	$\frac{3}{8}$ (9.5)	3.37 (1,529)
SWC215D2	2,150	3 (76.2)	3 (76.2)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	$\frac{3}{8}$ (9.5)	3.37 (1,529)
SWC235D1	2,350	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	$\frac{1}{2}$ (12.7)	4.77 (2,164)
SWC235D2	2,350	3 (76.2)	3 (76.2)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	1 $\frac{3}{4}$ (44.4)	$\frac{5}{16}$ (14.3)	$\frac{1}{2}$ (12.7)	4.77 (2,164)


\*Temperature rise test per; CEI60694, IEEE / ANSI C37, 34 1994.

#### Diagram

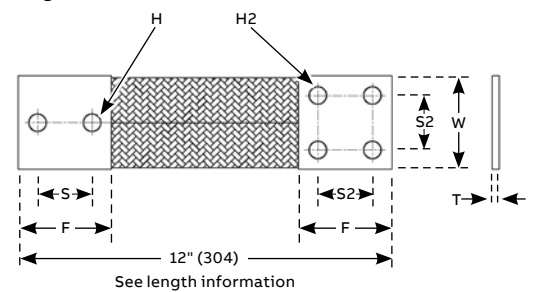

## SWC series

### 30 AWG individual strand

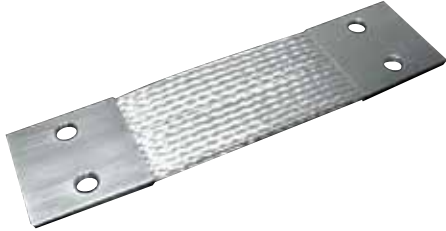

#### Ordering information:


**Length:** Standard total lengths are 304 mm (12 in.). If different lengths are required, add your desired length in millimeters at the end of the part number. Ex.: SWC150E1406 (for 16 in. long)

**Plating:** Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

#### Standard flexible connectors – 2/2-hole NEMA standard


Cat. no.	*Ampacity $\Delta$ 65 °C	W in. (mm)	F in. (mm)	S in. (mm)	H in. (mm)	S2 in. (mm)	H2 in. (mm)	T in. (mm)	Weight lb (g)
SWC130E1	1,300	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1¾ (44.4)	⅜ (14.3)	¼ (6.3)	2.00 (907)
SWC130E2	1,300	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1½ (38.1)	⅞ (11.1)	¼ (6.3)	2.00 (907)
SWC130E3	1,300	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	¼ (6.3)	2.00 (907)
SWC150E1	1,500	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1¾ (44.4)	⅜ (14.3)	⅜ (8)	2.72 (1,234)
SWC150E2	1,500	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1½ (38.1)	⅞ (11.1)	⅜ (8)	2.72 (1,234)
SWC150E3	1,500	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	⅜ (8)	2.72 (1,234)
SWC215E1	2,150	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1¾ (44.4)	⅜ (14.3)	⅜ (9.5)	3.43 (1,556)
SWC215E2	2,150	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1½ (38.1)	⅞ (11.1)	⅜ (9.5)	3.43 (1,556)
SWC215E3	2,150	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	⅜ (9.5)	3.43 (1,556)
SWC235E1	2,350	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1¾ (44.4)	⅜ (14.3)	½ (12.7)	4.85 (2,200)
SWC235E2	2,350	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1½ (38.1)	⅞ (11.1)	½ (12.7)	4.85 (2,200)
SWC235E3	2,350	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	½ (12.7)	4.85 (2,200)

Diagram

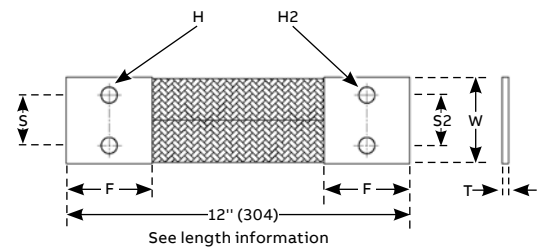

## SWC series

### 30 AWG individual strand

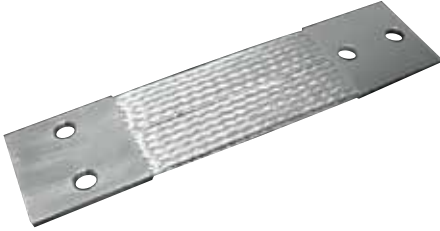

#### Ordering information:

**Length:** Standard total lengths are 304 mm (12 in.). If different lengths are required, add your desired length in millimeters at the end of the part number. Ex.: SWC150F1406 (for 16 in. long)


**Plating:** Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

#### Standard flexible connectors – 2/2-hole NEMA standard

Cat. no.	*Ampacity Δ 65 °C	W in. (mm)	F in. (mm)	S in. (mm)	H in. (mm)	S2 in. (mm)	H2 in. (mm)	T in. (mm)	Weight lb (g)
SWC130F1	1,300	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1¾ (44.4)	⅜ (14.3)	¼ (6.3)	2.00 (907)
SWC130F2	1,300	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1½ (38.1)	⅞ (11.1)	¼ (6.3)	2.00 (907)
SWC130F3	1,300	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	¼ (6.3)	2.00 (907)
SWC150F1	1,500	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1¾ (44.4)	⅜ (14.3)	⅜ (8)	2.72 (1,234)
SWC150F2	1,500	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1½ (38.1)	⅞ (11.1)	⅜ (8)	2.72 (1,234)
SWC150F3	1,500	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	⅜ (8)	2.72 (1,234)
SWC215F1	2,150	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1¾ (44.4)	⅜ (14.3)	⅜ (9.5)	3.43 (1,556)
SWC215F2	2,150	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1½ (38.1)	⅞ (11.1)	⅜ (9.5)	3.43 (1,556)
SWC215F3	2,150	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	⅜ (9.5)	3.43 (1,556)
SWC235F1	2,350	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1¾ (44.4)	⅜ (14.3)	½ (12.7)	4.85 (2,200)
SWC235F2	2,350	3 (76.2)	3 (76.2)	1¾ (44.4)	⅜ (14.3)	1½ (38.1)	⅞ (11.1)	½ (12.7)	4.85 (2,200)
SWC235F3	2,350	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	1½ (38.1)	⅞ (11.1)	½ (12.7)	4.85 (2,200)


\*Temperature rise test per; CEI60694, IEEE / ANSI C37, 34 1994.

#### Diagram

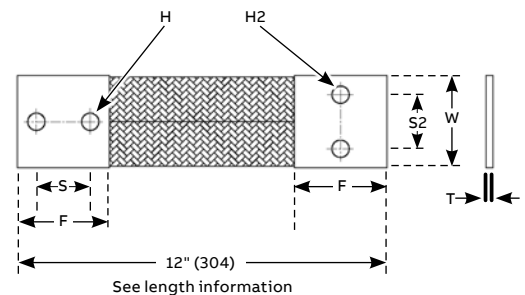

## SWC series

### 30 AWG individual strand

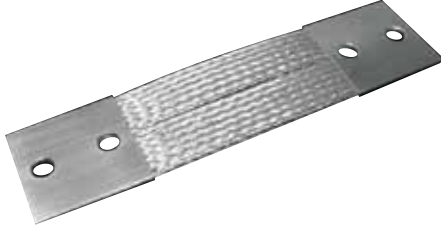

#### Ordering information:

**Length:** Standard total lengths are 304 mm (12 in.). If different lengths are required, add your desired length in millimeters at the end of the part number. Ex.: SWC130G1406 (for 16 in. long)


**Plating:** Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

#### Standard flexible connectors – 2/2-hole NEMA standard

Cat. no.	*Ampacity $\Delta$ 65 °C	W in. (mm)	F in. (mm)	S in. (mm)	H in. (mm)	S2 in. (mm)	H2 in. (mm)	T in. (mm)	Weight lb (g)
SWC130G1	1,300	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	$\frac{1}{4}$ (6.3)	2.00 (907)
SWC130G2	1,300	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	$\frac{1}{4}$ (6.3)	2.00 (907)
SWC130G3	1,300	3 (76.2)	3 (76.2)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	$\frac{1}{4}$ (6.3)	2.00 (907)
SWC150G1	1,500	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	$\frac{5}{16}$ (8)	2.72 (1,234)
SWC150G2	1,500	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	$\frac{5}{16}$ (8)	2.72 (1,234)
SWC150G3	1,500	3 (76.2)	3 (76.2)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	$\frac{5}{16}$ (8)	2.72 (1,234)
SWC215G1	2,150	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	$\frac{3}{8}$ (9.5)	3.43 (1,556)
SWC215G2	2,150	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	$\frac{3}{8}$ (9.5)	3.43 (1,556)
SWC215G3	2,150	3 (76.2)	3 (76.2)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	$\frac{3}{8}$ (9.5)	3.43 (1,556)
SWC235G1	2,350	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	$\frac{1}{2}$ (12.7)	4.85 (2,200)
SWC235G2	2,350	3 (76.2)	3 (76.2)	1 $\frac{3}{4}$ (44.4)	$\frac{9}{16}$ (14.3)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	$\frac{1}{2}$ (12.7)	4.85 (2,200)
SWC235G3	2,350	3 (76.2)	3 (76.2)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	1 $\frac{1}{2}$ (38.1)	$\frac{7}{16}$ (11.1)	$\frac{1}{2}$ (12.7)	4.85 (2,200)

\*Temperature rise test per; CEI60694, IEEE / ANSI C37, 34 1994.

#### Diagram

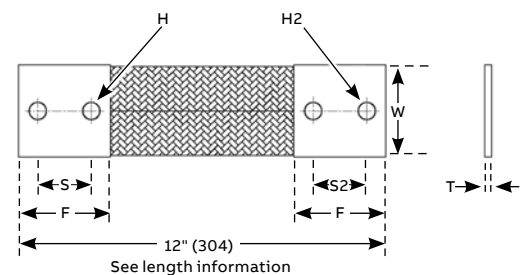

## SWC series

### 30 AWG individual strand



#### Ordering information:

Length: Standard total lengths are 304 mm (12 in.). If different lengths are required, add your desired length in millimeters at the end of the part number. Ex.: SWC130H1406 (for 16 in. long)


**Plating:** Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

#### Standard flexible connectors – 2/1-hole NEMA standard

Cat. no.	*Ampacity $\Delta$ 65 °C	W in. (mm)	F in. (mm)	S in. (mm)	H in. (mm)	H2 in. (mm)	T in. (mm)	Weight lb (g)
SWC130H1	1,300	3 (76.2)	3 (76.2)	1¼ (44.4)	⅝ (14.3)	⅝ (14.3)	¼ (6.3)	2.03 (921)
SWC130H2	1,300	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	⅝ (14.3)	¼ (6.3)	2.03 (921)
SWC150H1	1,500	3 (76.2)	3 (76.2)	1¼ (44.4)	⅝ (14.3)	⅝ (14.3)	⅝ (8)	2.74 (1,243)
SWC150H2	1,500	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	⅝ (14.3)	⅝ (8)	2.74 (1,243)
SWC215H1	2,150	3 (76.2)	3 (76.2)	1¼ (44.4)	⅝ (14.3)	⅝ (14.3)	⅜ (9.5)	3.46 (1,569)
SWC215H2	2,150	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	⅝ (14.3)	⅜ (9.5)	3.46 (1,569)
SWC235H1	2,350	3 (76.2)	3 (76.2)	1¼ (44.4)	⅝ (14.3)	⅝ (14.3)	½ (12.7)	4.87 (2,209)
SWC235H2	2,350	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	⅝ (14.3)	½ (12.7)	4.87 (2,209)

\*Temperature rise test per; CEI60694, IEEE / ANSI C37, 34 1994.

#### Diagram

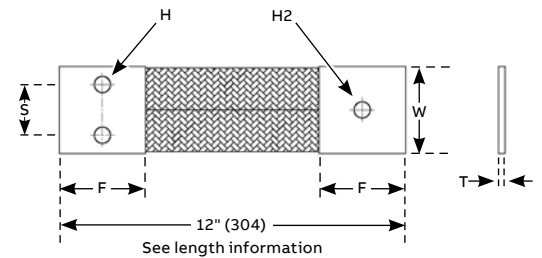

**SWC series**

30 AWG individual strand



**Ordering information:**

**Length:** Standard total lengths are 304 mm (12 in.). If different lengths are required, add your desired length in millimeters at the end of the part number. Ex.: SWC130J1406 (for 16 in. long)


**Plating:** Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

**Standard flexible connectors – 2/1-hole NEMA standard**

Cat. no.	*Ampacity Δ 65 °C	W in. (mm)	F in. (mm)	S in. (mm)	H in. (mm)	H2 in. (mm)	T in. (mm)	Weight lb (g)
SWC130J1	1,300	3 (76.2)	3 (76.2)	1¼ (44.4)	⅞ (14.3)	⅞ (14.3)	¼ (6.3)	2.03 (921)
SWC130J2	1,300	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	⅞ (14.3)	¼ (6.3)	2.03 (921)
SWC150J1	1,500	3 (76.2)	3 (76.2)	1¼ (44.4)	⅞ (14.3)	⅞ (14.3)	⅝ (8)	2.74 (1,243)
SWC150J2	1,500	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	⅞ (14.3)	⅝ (8)	2.74 (1,243)
SWC215J1	2,150	3 (76.2)	3 (76.2)	1¼ (44.4)	⅞ (14.3)	⅞ (14.3)	⅜ (9.5)	3.46 (1,569)
SWC215J2	2,150	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	⅞ (14.3)	⅜ (9.5)	3.46 (1,569)
SWC235J1	2,350	3 (76.2)	3 (76.2)	1¼ (44.4)	⅞ (14.3)	⅞ (14.3)	½ (12.7)	4.87 (2,209)
SWC235J2	2,350	3 (76.2)	3 (76.2)	1½ (38.1)	⅞ (11.1)	⅞ (14.3)	½ (12.7)	4.87 (2,209)

\*Temperature rise test per; CEI60694, IEEE / ANSI C37, 34 1994.


**Diagram**

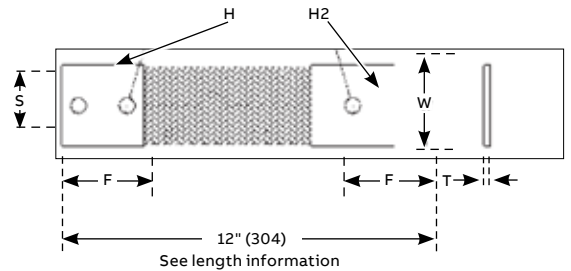



## SWC series

### 30 AWG individual strand

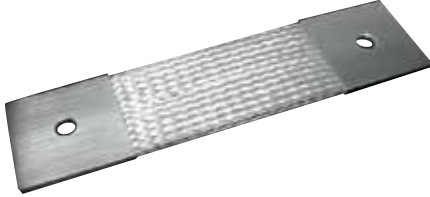

#### Ordering information:

**Length:** Standard total lengths are 304 mm (12 in.). If different lengths are required, add your desired length in millimeters at the end of the part number. Ex.: SWC130K1406 (for 16 in. long)

**Plating:** Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

#### Standard flexible connectors – 1/1-hole NEMA standard

Cat. no.	*Ampacity Δ 65 °C	W in. (mm)	F in. (mm)	H in. (mm)	T in. (mm)	Weight lb (g)
SWC060K1	600	2 (50.8)	2 (50.8)	1/16 (14.3)	1/4 (6.3)	1.84 (835)
SWC060K2	600	2 (50.8)	2 (50.8)	1/16 (11.1)	1/4 (6.3)	1.84 (835)
SWC130K1	1,300	3 (76.2)	3 (76.2)	1/16 (14.3)	1/4 (6.3)	2.04 (925)
SWC130K2	1,300	2 (50.8)	2 (50.8)	1/16 (14.3)	1/2 (12.7)	2.53 (1,148)
SWC140K1	1,400	2 (50.8)	2 (50.8)	1/16 (11.1)	1/2 (12.7)	2.53 (1,148)
SWC150K1	1,500	3 (76.2)	3 (76.2)	1/16 (14.3)	5/16 (8)	2.77 (1,256)
SWC160K1	1,600	4 (101.6)	4 (101.6)	1/16 (14.3)	1/4 (6.3)	2.99 (1,356)
SWC215K1	2,150	3 (76.2)	3 (76.2)	1/16 (14.3)	3/8 (9.5)	3.46 (1,569)
SWC235K1	2,350	3 (76.2)	3 (76.2)	1/16 (14.3)	1/2 (12.7)	4.93 (2,236)

\*Temperature Rise test per; CEI60694, IEEE / ANSI C37, 34 1994

#### Diagram

