

EA Triangular Series

Extruded aluminum pictogram sign




Features

- Long-life white LED light sources is warranted for ten (10) years
- Supplied standard with two pictogram films, for direction selection
- Universal AC input: two-wire 120 to 347VAC; standard DC input: two-wire 6 to 24VDC
- Energy efficient – consumes less than 2.5W in AC or DC-remote mode per face
- Easy access to wiring entry for all mounting options
- Special wording available (CSA C22.2 No. 250.0)
- Meets or exceeds CSA 22.2 No.141-15
- **Warranty details at: www.emergi-lite.ca**

Dimensions

Dimensions are approximate and subject to change.

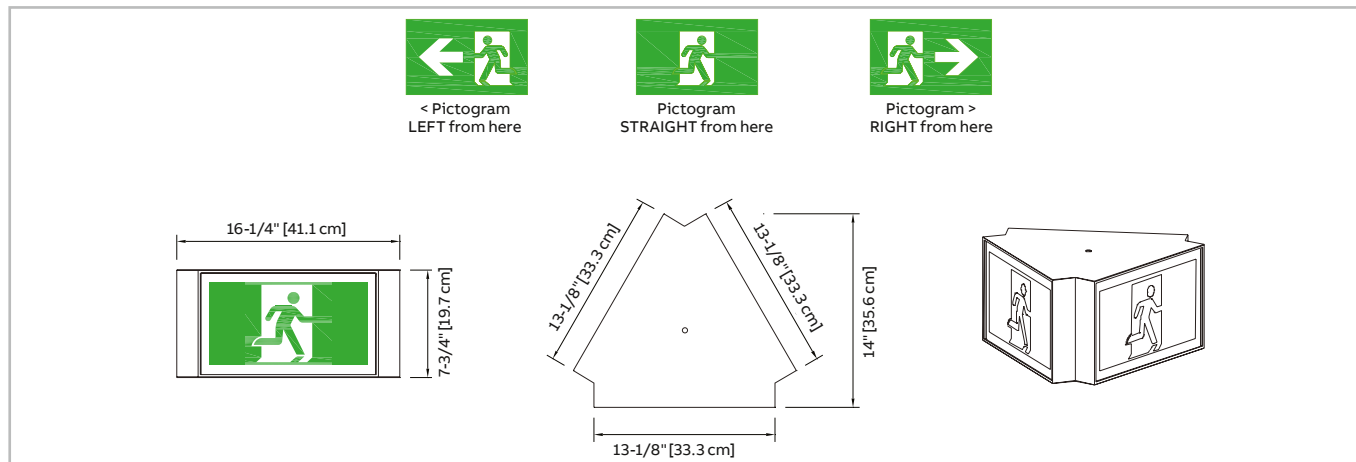

Ordering information

Series	Faces/mounting	Colour	Voltage	Options
EA= pictogram sign	T2S= triangular 2 sided, wall and pendant mount only T3S= triangular 3 sided, pendant mount only	W= factory white	U= 120 to 347VAC; 6 to 24VDC	CL= special wording D4= arrow down 45° D9= arrow down TP= tamper-proof screws ¹ U4= arrow up 45° U9= arrow up

Example: EAT2SWUNIVTP

¹990.0119-E= tamper-proof bit (sold separately)

Typical specifications

Supply and install the **Emergi-Lite® EA Triangular Series** pictogram signs.

The equipment shall operate with universal 2-wire AC input voltage of 120 to 347VAC at less than 2.5W and universal 2-wire DC input voltage from 6 to 24VDC at less than 1.5W per face. The equipment shall be suitable for wall or pendant, or ceiling mount. The housing shall be constructed of rugged extruded aluminum. The faceplate(s) shall be constructed of extruded aluminum and shall incorporate a protective clear polycarbonate panel. Each faceplate shall come standard with two legend films for pictogram and direction selection.

The light source shall be white light-emitting diodes (LED) and shall provide even illumination in normal and emergency operation.

The pictogram sign shall meet CSA 22.2 No.141-15.

The equipment shall be **Emergi-Lite®** model: _____.

Power consumption (per face)

Model	AC specs	DC specs
AC/DC standard	120 to 347VAC < 2.5W	6 to 24VDC < 1.5W