

New product

ERAU Series

Recessed architectural battery unit



Features

- Recessed installation in T-bar suspended ceiling and easily spring mounted in Gyproc ceiling
- All-metal backbox enclosure
- Thermoplastic rectangular fixture with additional round trim-plate, white finish
- Long-life, high-temperature rated lithium battery
- Infrared remote test control (up to 30ft)
- Two-wire universal AC input: 120 – 347VAC 50-60Hz
- 90 minutes of emergency lighting
- Fixed optics, optimized light distribution for ceiling heights of eight to 12 ft
- Four high-intensity LED sources with redundant connections; CCT 5000K
- Listed NSF, splash non-food zones
- Certified cUL to CSA 22.2 No.141-15
- Optional housing for plenum or insulated ceilings (IC)
- Black thermoplastic decorative trim-plates
- Power over ethernet supply (requires a dedicated PoE switch powered by unswitched AC line) available
- Nexus®Pro: IOT emergency lighting monitoring system optional
- Fixed, square distribution pattern up to 12-ft ceilings
- Self-test and diagnostic functions
- 1-year limited warranty
- **Warranty details at: www.emergi-lite.ca**



Remote test control



Suggested specifications

Supply and install the **ERAU Series** of recessed emergency lighting unit from **Emergi-Lite®**. The unit construction shall include an all-metal housing and a thermoplastic rectangular trim-plate with a detachable circular trim ring for choice of aesthetics. The optics shall be an impact-resistant polycarbonate lens with fixed light distribution, optimized for ceilings of 8 to 12-ft height. The housing shall include an isolated compartment for electrical connections and a detachable cover with knockouts for electrical supplies. The unit shall include a hardware kit for installation in T-bar suspended ceilings.

The emergency lights shall be four high-intensity LED with operational life of minimum 36,000 hours, until 70% of the initial light level (reported L70). The LEDs shall have redundant interconnections: eventual failure of one of them shall allow others to function. The unit shall have a two-wire universal input rated 120-347VAC, 50/60Hz and shall be equipped with a lithium battery. The charger circuit shall provide: AC lock-out, brownout transfer, and battery disconnect at the end of discharge. The charger shall be micro-controller-based and include self-test and diagnostic functions; the unit shall self-test for one minute every month, 30 minutes every six months and 90 minutes annually. The pilot light shall be a bi-color LED, installed behind the main optics and shall change color from normal green to flashing red when a failure is detected from the battery, charger circuit or lamps. A label located on the equipment housing shall describe the diagnostic for each flashing code. The unit shall be supplied with an infrared remote test control to start a manual test of one-minute duration or cancel it if needed.

The unit shall be cUL certified to CSA 22.2 No.141-15

The unit shall be **Emergi-Lite®** model: _____.


Power consumption and unit rating

AC	Input (VAC)	Maximum			Stand-by power (W)
		Current (A)	Power (W)	Power factor	
	120	0.03		0.6	
	277	0.02	2.8	0.5	0.5
	347	0.02		0.45	
POE	DC supply (V)		Maximum		
			Current (A)	Power (W)	
	44-57		0.08	3	

Housing colour



Black




Factory white

EMERGI-LITE

Dimensions

Dimensions are approximate and subject to change.

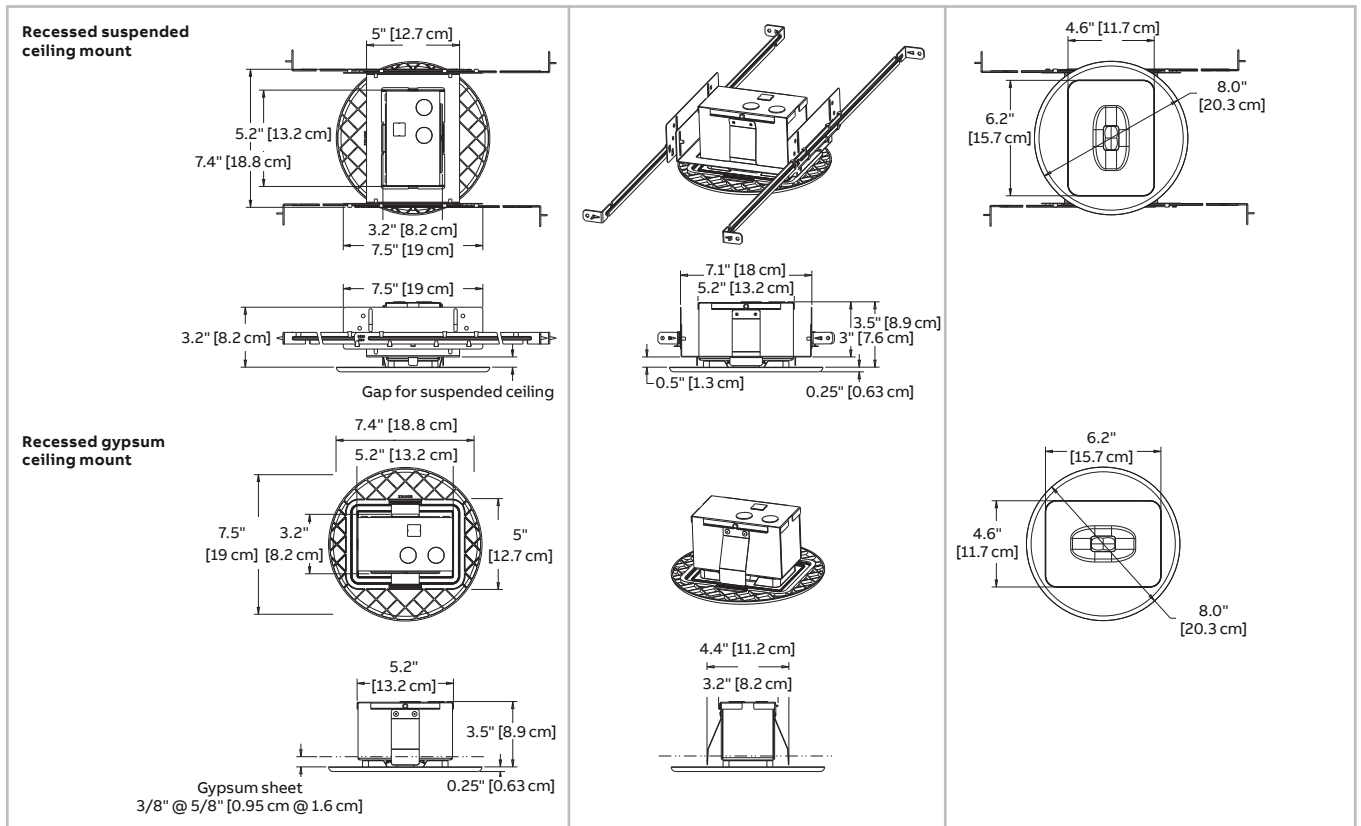

Photometry performance

The **ERAU Series** has a fixed lighting distribution, optimized by design for ceiling heights up to 12 ft. The **ERAU Series** delivers a stable and optimal illumination easy to specify. Along an office corridor the space coverage ranges from 68 to 80 feet. The square distribution pattern covers a surface of more than 700 square feet.



Table A: Standard unit 6-ft wide corridor¹

Mounting height	Spacing centre-to-centre
9 ft	68 ft
10 ft	80 ft
12 ft	72 ft

Table B: Option "square distribution pattern" – single unit coverage¹

Mounting height	Room size	Room surface
10 ft	27 ft x 27 ft	729 square feet

¹Typical reflectance levels of walls/ceiling/floor: 80/50/20

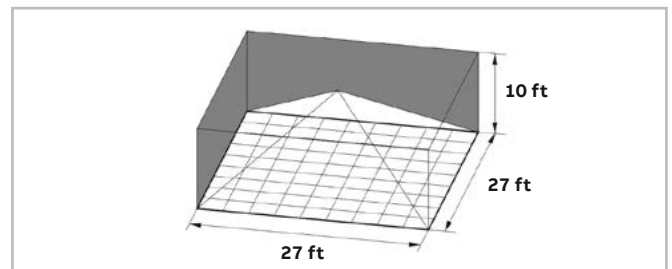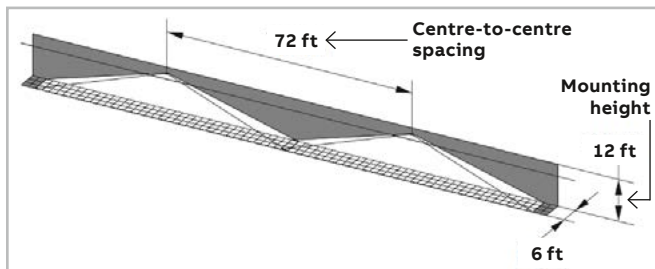

Ordering information

Series	Colour	Voltage	Unit type	Options
ERAU= recessed architectural battery unit	BK= black WH= factory white	Blank= 120 to 347VAC, 50/60Hz POE= power over ethernet	Blank= standard NEXP= IOT Nexus [®] Pro UN= advanced diagnostics, non-audible	Blank= no options D3= 15 minute time delay P= plenum/type IC rated SQ= square distribution pattern

Example: ERAUWHPOE

The Bluetooth[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by ABB Inc. is under license. Other trademarks and trade names are those of their respective owners.