

Boost Productivity and Reduce User Fatigue in Demanding, High-Volume Cable Tie Installations!

Ty-Rap®

Pneumatic Cable Tie Installation Tool



- 1 Easy-access tension wheel sets tensile strength up to 50 lb
- 2 Locking mechanism enables constant tension for repetitive work
- 3 Dual hangers for organized storage
- 4 Handy access to spare cutting blade in handle
- 5 Over-sized trigger for easy activation
- 6 Soft, over-molded hand grip
- 7 Narrow-shaped nose rotates 360° for tight spaces
- 8 9-ft. air hose included with tool

Ty-Rap® Pneumatic Cable Tie Installation Tool

**360° Rotating Nose
Maximizes Flexibility
in Tight Spaces —
No Twisting Required!**

For fast, consistent installation of cable ties in high-volume applications, you can't beat the new Ty-Rap® Pneumatic Cable Tie Installation Tool. Pneumatic power combined with ergonomic design enables you to tension and trim large quantities of Ty-Rap® cable ties in rapid succession with accuracy and one-button ease.

High on operator comfort, this tool packs performance features as well. Rotate the narrow nose 360° to maneuver in the tightest of spaces with ease. Set the tension with a quick twist of the tension-adjustment wheel — located near the nose for convenient access. For repetitive work requiring a constant tension, use the tension lock to prevent accidental change of setting when you put down and pick up the tool again. A storage slot in the handle even keeps a spare cutting blade readily at hand.

Use the Ty-Rap® Pneumatic Cable Tie Installation Tool to install Ty-Rap® cable ties from 18 to 50 lb in tensile strength.



Typical Applications

- Panel building
- Wiring-harness assembly
- Other OEM applications involving high-volume installation of cable ties

Specifications

Dimensions:	10"L x 6-1/4"H x 1-5/8"D
Weight:	14 oz.
Operating Pressure:	85–100 psi (non-lubricated air)
Cable Tie Tensile-Strength Range:	18–50 lb





Designed for Convenience and Productivity

- Easy, one-step tensioning and cut-off of a wide range of cable ties
- Narrow-shaped nose rotates 360° for optimum maneuverability in tight spaces
- Tension-adjustment wheel at nose enables easy access and quick setting up to 50 lb
- For repetitive-tension applications, built-in locking mechanism maintains constant tension setting — even when tool is frequently put down and picked up again
- Storage in handle keeps spare cutting blade readily at hand
- Holds cut-off tails captive until ejected by operator — no mess to clean up
- Wide cable-tie insertion gap speeds installation — no fumbling to insert tie
- Two built-in hangers facilitate easy storage of tool when not in use
- Nine-foot air hose included for fast connection to your air supply

Designed for Comfort and Safety

- Balanced, ergonomic design reduces user strain and fatigue
- Soft, over-molded grip cushions user's hand
- Over-sized trigger enables easy activation
- Impact-resistant polymer housing yields maximum durability, minimum weight
- Cuts tail off flush — no sharp ends to injure installers or damage cables

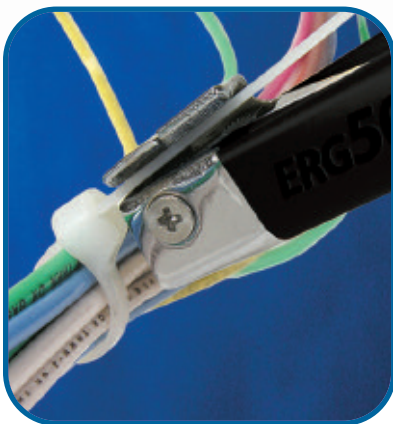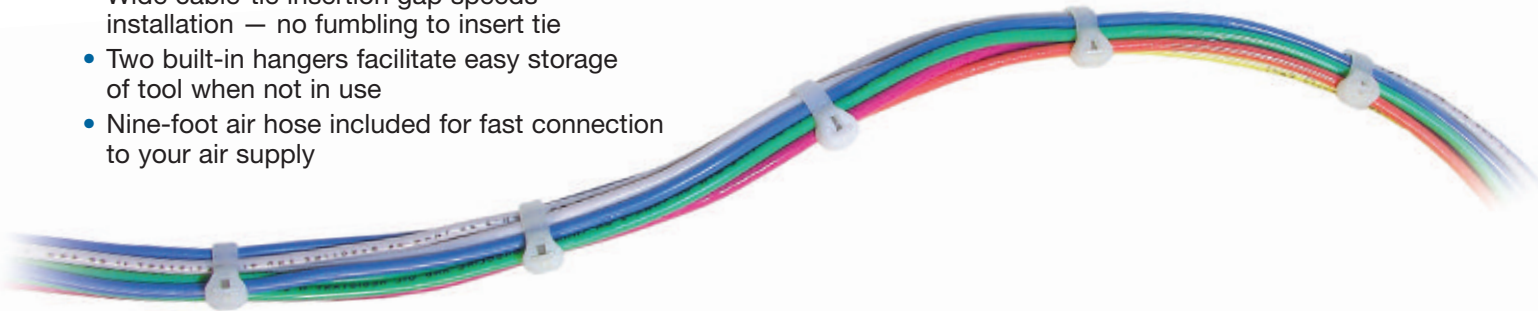

Tightens cable tie and cuts flush in one step



360° rotating nose for maximum flexibility



Narrow-shaped nose for easy reach in tight spaces



Ty-Rap® Pneumatic Cable Tie Installation Tool



Ty-Rap® Pneumatic Cable Tie Installation Tool


Cat. Number	Description	Std. Pkg. Qty.	UPC Number
ERG50P	Pneumatic Cable Tie Installation Tool for 18–50 lb. Ties (includes 9-ft. air hose)	1	78620989207

The Ty-Rap® Cable Tie Installation Tool is Designed for Use with All Ty-Rap® Cable Ties

Ty-Rap® Cable Ties

Industrial Strength for the Most Demanding Work!

- Infinitely adjustable design ensures the right fit
- 316 stainless steel locking device for The Grip of Steel® holding power
- Oval, low-profile head and smooth, molded body — no notches to create stress points or snag during pulling
- Available in materials to suit a variety of applications/environments
- UL and Military Listed

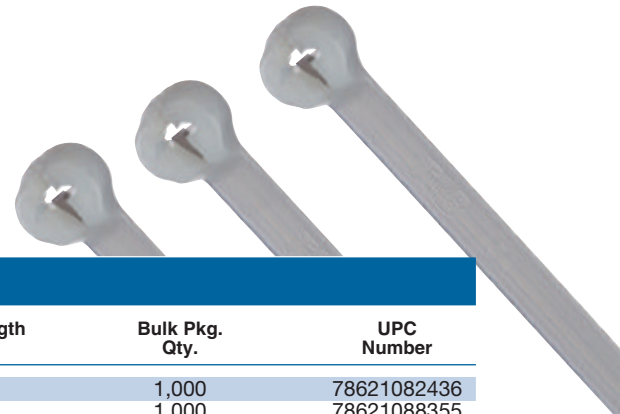

Ty-Rap® Natural Nylon 6.6 Cable Ties

Cat. Number	Body Width (in.)	Length (in.)	Max. Wire Bundle Dia (in.)	Tensile Strength (lb)	Bulk Pkg. Qty.	UPC Number
TY23M	0.09	3.62	0.63	18	1,000	78621082436
TYB2315M	0.09	7.00	1.50	18	1,000	78621088355
TY232M	0.09	8.00	2.00	18	1,000	78621083069
TY234M	0.09	14.00	4.00	18	1,000	78621083070
TY24M	0.14	5.50	1.13	40	1,000	78621082447
TY242M	0.14	8.19	2.00	40	1,000	78621083071
TY26M	0.14	11.10	3.00	30	1,000	78621082468
TY244M	0.14	14.50	4.00	30	1,000	78621083072
TY25M	0.19	7.31	1.75	50	1,000	78621082457
TY253M	0.19	11.60	3.00	50	1,000	78621083990
TY28M	0.19	14.20	4.00	50	1,000	78621082479

Atlantic Region

Thomas & Betts Limited
106 Chain Lake Drive, Unit 2C
Halifax, Nova Scotia B3S 1A8
Tel.: (902) 450-1307
Toll Free: 1-877-862-4357
Fax: (902) 450-1309

Quebec Region

Thomas & Betts Limited
7900 Taschereau Boulevard
Building D, Suite 108
Brossard, Quebec J4X 1C2
Tel.: (450) 466-1102
Toll Free: 1-800-465-1399
Fax: (450) 466-1163

Ontario Region

Thomas & Betts Limited
2000 Argentia Road
Plaza 5, Suite 500
Mississauga, Ontario L5N 2R7
Tel.: (905) 858-1010
Toll Free: 1-877-291-7771
Fax: (905) 858-1080

Western Region

Thomas & Betts Limited
6531-148th Street, #1
Surrey, British Columbia
V3S 3C5
Tel.: (604) 598-9811
Toll Free: 1-866-540-8220
Fax: (604) 598-9840

Thomas & Betts Limited
4836 Eleniak Road
Edmonton, Alberta T6B 2S1
Tel.: (780) 424-7092
Toll Free: 1-888-664-5666
Fax: (780) 424-7093
Toll Free: 1-866-424-4082

www.tnb-canada.com

Thomas & Betts