


SWC/D series

30 AWG individual strand

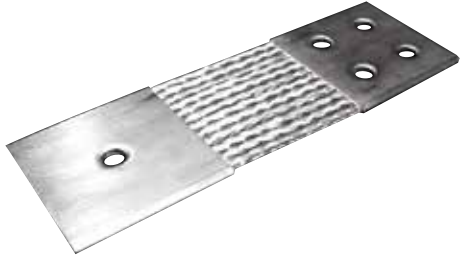

Ordering information:

Length: Standard total lengths are 304 mm (12 in.). If different lengths are required, add your desired length in millimeters at the end of the part number.

Ex.: SWC130B1406 (for 16 in. long)

Plating: Standard ferrules are electro-tin plated. Other options are available; please refer to page D4.

Standard flexible connectors – 4/1-hole NEMA standard

Cat. no.	*Ampacity Δ 65 °C	W in. (mm)	F in. (mm)	S in. (mm)	H in. (mm)	H2 in. (mm)	T in. (mm)	Weight lb (g)
SWC130B1	1,300	3 (76.2)	3 (76.2)	1 3/4 (44.4)	9/16 (14.3)	9/16 (14.3)	1/4 (6.3)	1.99 (903)
SWC150B1	1,500	3 (76.2)	3 (76.2)	1 3/4 (44.4)	9/16 (14.3)	9/16 (14.3)	5/16 (8)	2.69 (1,220)
SWC215B1	2,150	3 (76.2)	3 (76.2)	1 3/4 (44.4)	9/16 (14.3)	9/16 (14.3)	3/8 (9.5)	3.40 (1,542)
SWD160B1	1,600	4 (101)	4 (101)	1 3/4 (44.4)	9/16 (14.3)	9/16 (14.3)	1/4 (6.3)	2.60 (1,179)
SWD160B2	1,600	4 (101)	4 (101)	2 (50.8)	9/16 (14.3)	23/32 (18.2)	1/4 (6.3)	2.60 (1,179)
SWD190B1	1,900	4 3/4 (120.6)	4 (101)	1 3/4 (44.4)	9/16 (14.3)	9/16 (14.3)	1/4 (6.3)	2.72 (1,234)
SWD190B2	1,900	4 3/4 (120.6)	4 (101)	2 (50.8)	9/16 (14.3)	23/32 (18.2)	1/4 (6.3)	2.72 (1,234)
SWD210B1	2,100	3 3/4 (95.3)	4 (101)	1 3/4 (44.4)	9/16 (14.3)	9/16 (14.3)	3/8 (9.5)	4.01 (1,819)
SWD210B2	2,100	3 3/4 (95.3)	4 (101)	2 (50.8)	9/16 (14.3)	23/32 (18.2)	3/8 (9.5)	4.01 (1,819)

*Temperature rise test per: CEI60694, IEEE / ANSI C37, 34 1994.

Diagram

