



**N**

new product

# LSC-BLD Series

## Steel Combination Unit



### FEATURES

- “Built-in” 3W LED heads
- Universal mounting: end, wall or ceiling
- Sealed, maintenance-free, 6V Lead-Calcium battery
- Meets or exceeds CSA 22.2 No. 141-15

See warranty details at: [www.tnb.ca/en/brands/lumacell](http://www.tnb.ca/en/brands/lumacell)

### TYPICAL SPECIFICATIONS

Supply and install Lumacell® LSC-BLD Series combination of unit equipment and pictogram Exit Sign. The unit shall be made of solid steel sheet metal and be suitable for universal mounting: wall, end, or ceiling. The legend housing shall have a maximum depth of 2-1/8”. The legend face plate(s) shall be constructed of robust clear polycarbonate panel(s) with an opaque border coloured factory-white. The light source shall be white light-emitting diodes (LED) and shall provide even illumination in normal and emergency operation. The power pack shall include one circuit board with test switch and pilot light for battery charger and legend LED driver. The unit shall include one 6V, maintenance-free, sealed Lead-Calcium battery and shall provide minimum 30 minutes of emergency lighting upon AC power failure. The electrical power available for emergency lights shall be 24W.

The equipment shall be CSA 22.2 No. 141-15 certified.

The equipment shall be Lumacell® Model: \_\_\_\_\_ .

### WIRE GUARDS

460.0081-L	Wall mount
460.0060-L	Ceiling mount




new product



# LSC-BLD Series Steel Combination Unit

## DIMENSIONS

Dimensions are approximate and subject to change.

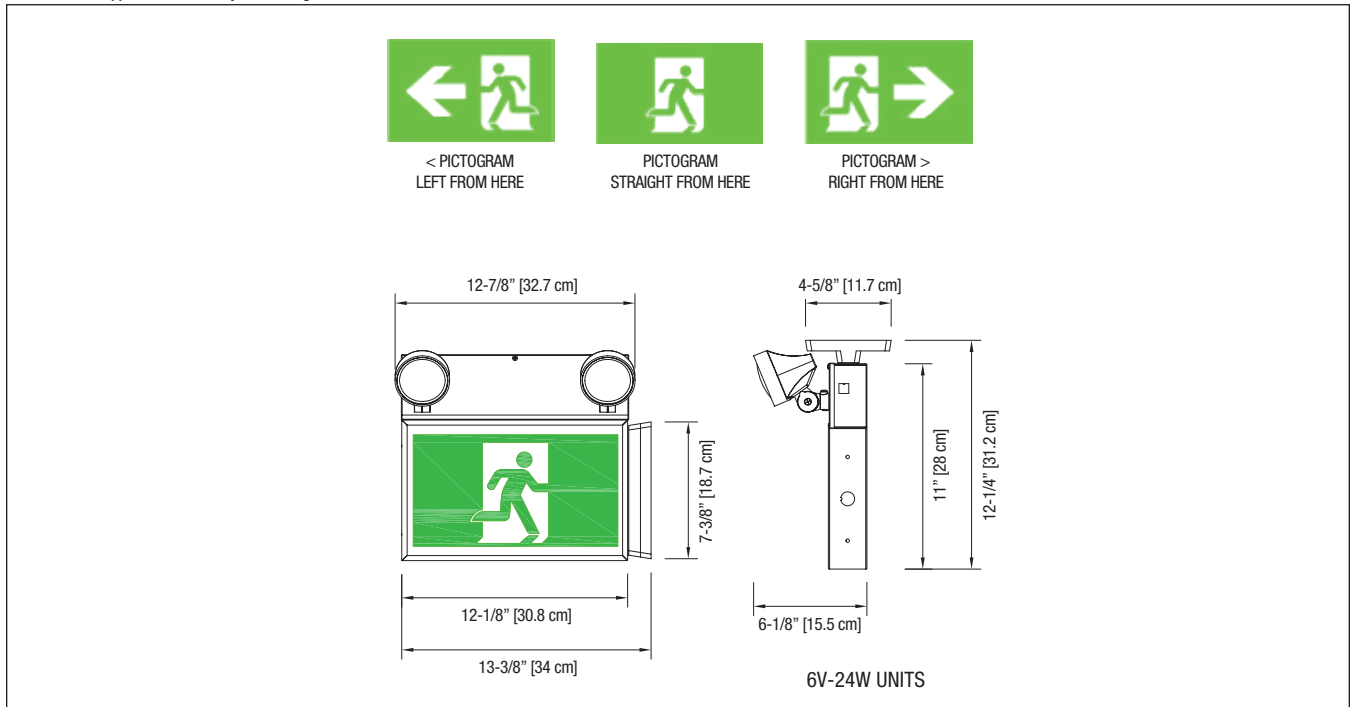

## POWER CONSUMPTION

MODEL	AC SPECS		EMERGENCY POWER AVAILABLE FOR LAMPS				
			30MIN	1H00	1H30	2H00	4H00
Pictogram module	120/347VAC	Less than 1.5W	-	-	-	-	-
LCS24		0.13 / 0.05 A	24	14	10	8	4

## ORDERING INFORMATION

SERIES	VOLTAGE/ CAPACITY	COLOUR	HEADS	HEAD STYLE AND POWER	OPTIONS
LSC= Pictogram steel combo exit sign	24= 6V-24W	W= Factory white	1= One head 2= Two heads	BLD= Built-in LED	DF= Double face sign ZC= 120/277VAC input

EXAMPLE: LSC24W2BLD

Unlike Exit Signs this pictogram sign is not available in double arrow configuration.